




SEDAL GROUP

Polígono Industrial Can Sunyer · C/Química, 2-12
E-08740 Sant Andreu de la Barca (Barcelona) · Spain
Tel. +34 93 680 33 00 · Fax +34 93 680 33 03
sedal@sedal.com · www.sedal.com

ECOFLOW CARTRIDGE

The new ECOFLOW cartridge range has been specially designed for low flow applications. Thanks to a new patented technology, this cartridge helps saving water and provides maximum comfort to the user. This new system is available in 25mm, 35mm and 40mm cartridges.


ecoflow



ADVANTAGES




3 Reduces temperature fluctuation
When using a flow limiter in the spout combined with standard cartridges, the user can experience strong changes in water temperature. The new ECOFLOW Tech valves provide an excellent temperature stability in front of pressure variations in cold and hot water supply lines at low flow rates.

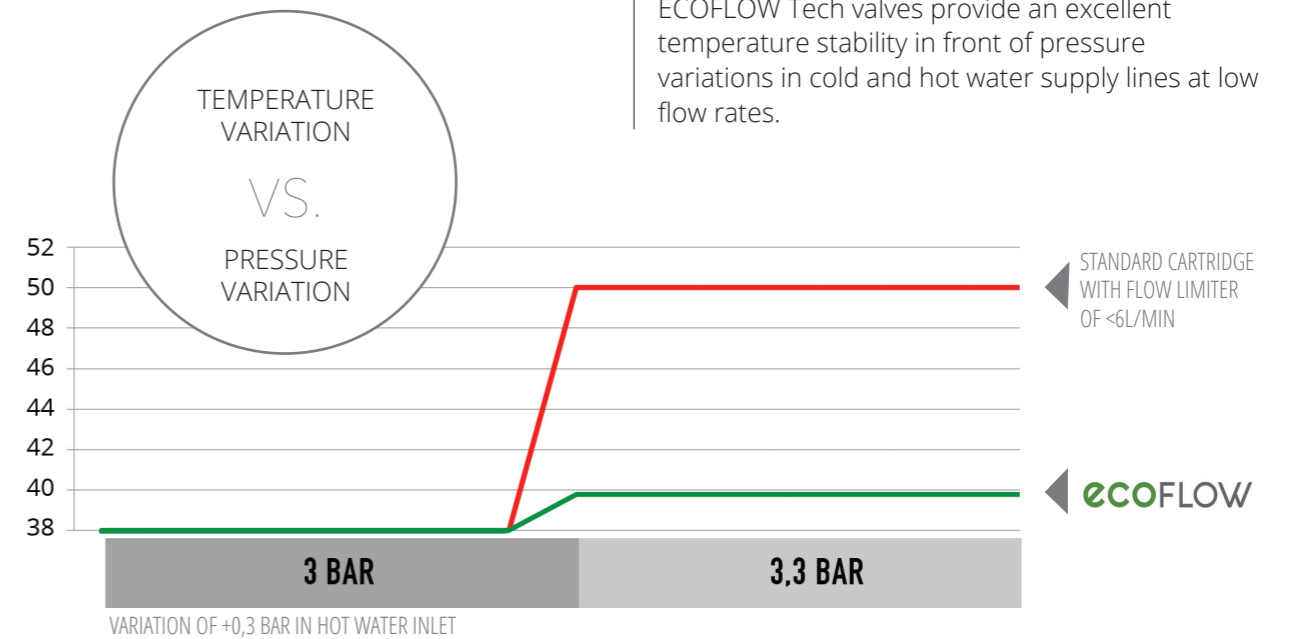


4 Improved flow-rate vs handle-stroke
Existing solutions offer a very limited opening stroke to regulate the flow. With ECOFLOW, the entire stroke is available.

1 Optimised for WaterSense and Waterlabel
Ecoflow Tech is optimised to comply with WaterSense and WaterLabel requirements.




KTW, WRAS, AS/
NZS, NSF, ACS
WATERSENSE
WATERLABEL
CERTIFIED

2 The usage of a restrictor is optional
The flow rate reduction is carried out at the right place. With ECOFLOW the usage of a limiter or restrictor is optional. It is necessary the installation of filters in the hydraulic line.

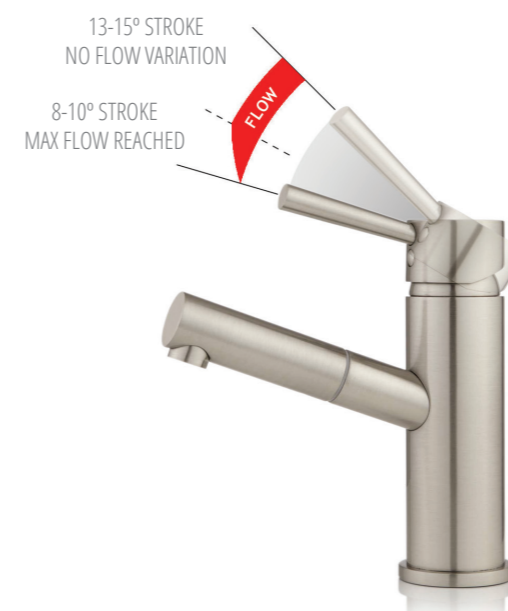

STANDARD CARTRIDGE
MAX. FLOW: 6/L MIN WITH LIMITER

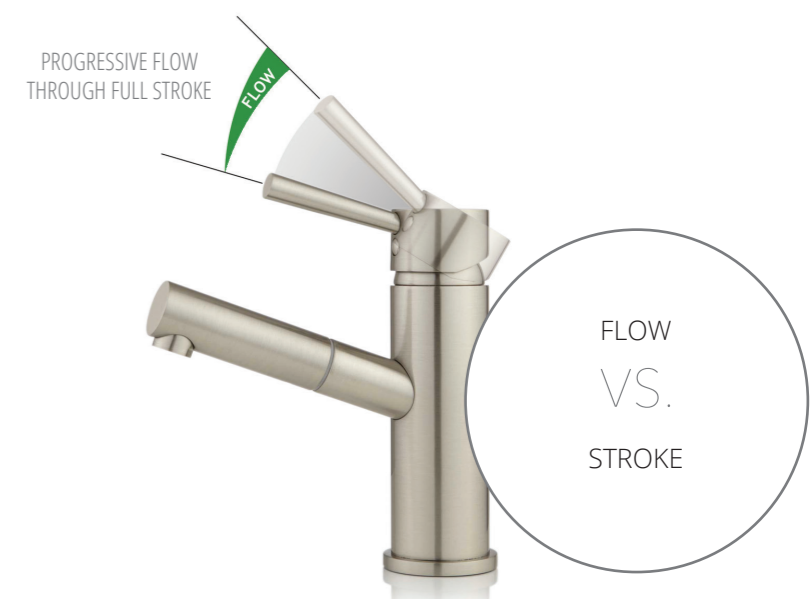

ECOFLOW CARTRIDGE
MAX. FLOW: 6/L MIN WITH ECOFLOW