


# VERTA

HOME DECORATION COLLECTION

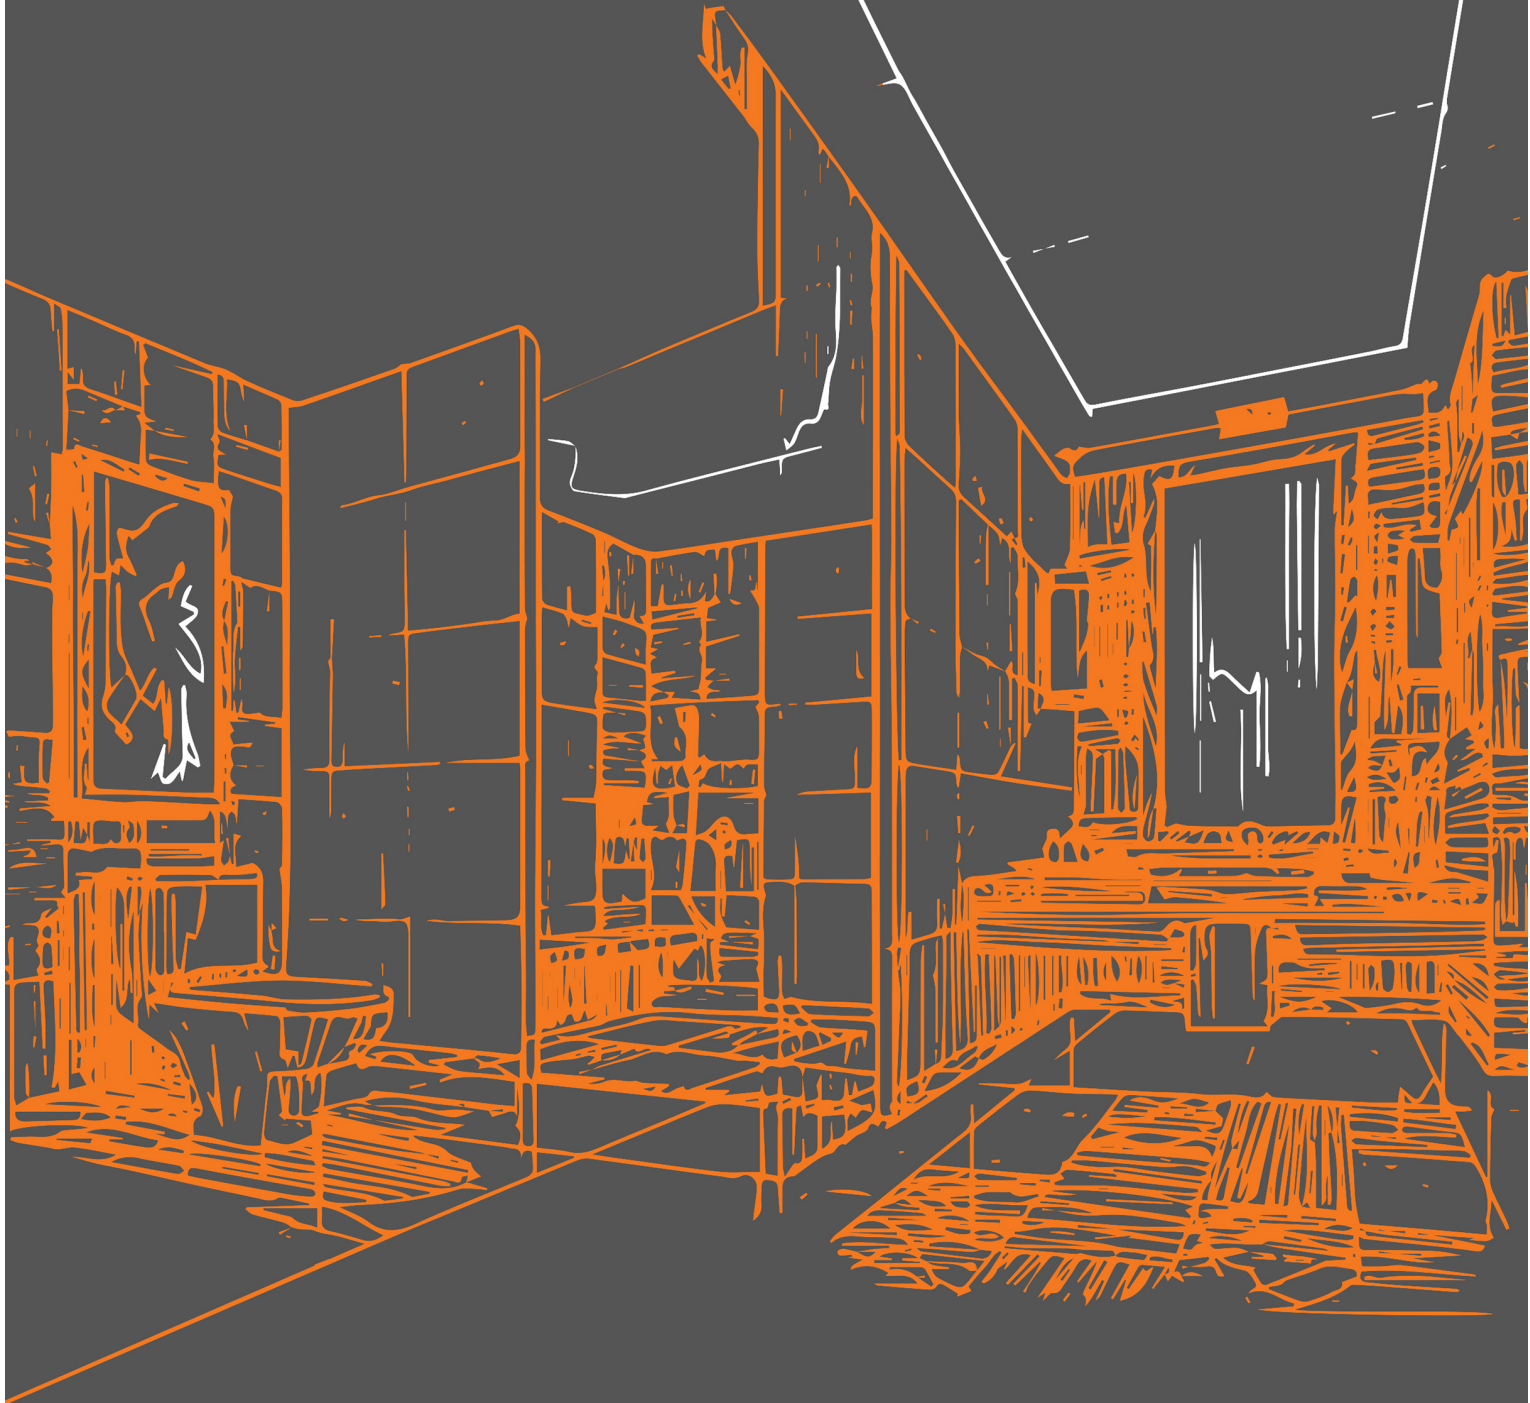

**GOOD DESIGN**  
IS GOOD BUSINESS

**VERTA**  
HOME DECORATION COLLECTION



توالٹ فرنگی



والہنگ





## WK - 0308

**DIMENSION** | Tornado - 4D Double hole  
One-Piece toilet  
Size : 700 \* 380 \* 730 mm  
S-trap(axis): 250mm



white



## WK - 0309

**DIMENSION** | Wash down  
One-Piece toilet  
Size : 690 \* 360 \* 710 mm  
S-trap(axis): 220mm



white



## WK - 0328

**DIMENSION** | Wash Down sys  
One-Piece toilet  
Size : 680 \* 360 \* 755 mm  
S-trap(axis): 250mm



white



## WK - 0344

**DIMENSION** | Tornado - 4 shooting hole  
One-Piece toilet  
Size : 720 \* 425 \* 770 mm  
S-trap(axis) : 220 mm



white black gray gold silver





## WK - 0642

**DIMENSION** | Washdown  
One-Piece toilet  
Size :735 \* 505 \* 750 mm  
S-trap(axis): 250mm



white



## WK - 0659

**DIMENSION** | Wash down  
One-Piece toilet  
Size :665\* 455 \* 560 mm  
S-trap(axis): 300mm



white



## Ferrari

**DIMENSION** | Tornado - 4 Double hole  
One-Piece closet  
Size :710 \* 385 \* 745 mm  
S-trap(axis) 220 mm



white black gray gold silver



## Cochin

**DIMENSION** | Siphonic One-Piece toilet  
Size :670 \* 360 \* 730 mm  
S-trap(axis): 220mm



white





## Hilton

**DIMENSION** | Wash down  
One-Piece toilet  
Size :680 \* 420 \* 730 mm  
S-trap(axis): 250mm



white



## Austin

**DIMENSION** | siphonic  
one piece toilet  
Size :715 \* 370 \* 755mm  
S-trap(axis): 220-300mm



white



## Cody

**DIMENSION** | siphonic one piece toilet  
size :640\*360\*765mm  
strap:220 mm



white black gray



## Oscar

**DIMENSION** | Double hole  
One-Piece toilet  
Size :670 \* 410 \* 715 mm  
S-trap(axis): 220mm



white





## Calanda

DIMENSION

Wash down

One-Piece toilet

Size :680 \* 390 \* 680 mm

S-trap(axis): 250mm



white





# Back to wall SMART toilet



## WK-H8

back to wall SMART toilet

Size :680\* 420\*530mm

DIMENSION




white



### Specification

Name		Smart Toilet		
Voltage		AC220V 50/60Hz		
Heating Tank		0.3 L		
Inlet Water Temp.		1°C~30°C		
Inlet Water Pressure		0.15~0.75 Mpa		
Water Temp.		Adjustable Range: 30°C~40°C		
Washing Device	Water Output	Rear Bidet	0.35~1.2 L/min (0.2MPa)	
	Position	Rear Bidet		50~90 mm
	Power Rate	1600w		
Safety Device	Flow sensor, Temp sensor, Temp Switch, Temp Fuse			
Rated power		1430w (Inlet Temp 15°C±2°C, 0.2MPa)		
Speed		≥4m/s		
Temp.		4 Levels (home temp~55°C)		
Drying Power		250w		
Safety Device		Double metal sheet switch& Temp fuse		
Surface Temp.		4 Levels (home temp~40 C)		
Heating Power		45w		
Safety Device		Temp controller & Temp fuse		
Structure		Soft close		
Safety Device		Leakage protection & Seating sensor		
Length of wire		1.5m		

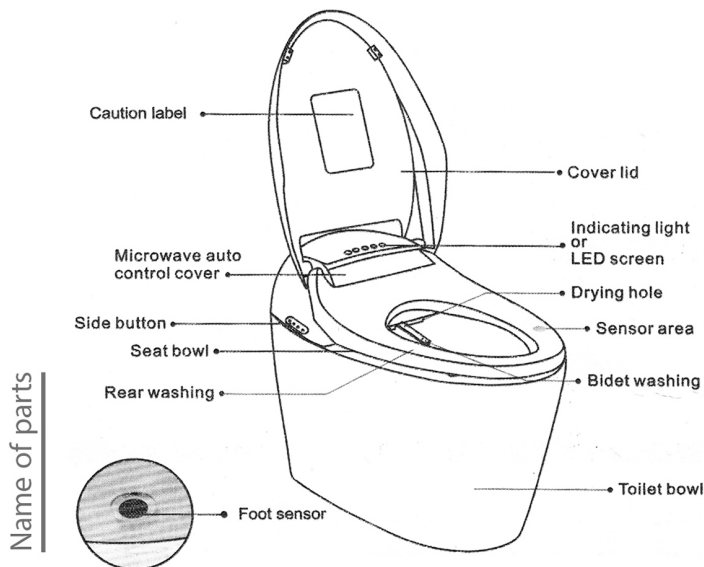

Remote Control







## Milan



DIMENSION

Wash down Wall – hang toilet

Size : 545 \* 385 \* 340 mm

P – trap : 180 mm



white



## Diamond



DIMENSION

Wash down Wall – hang toilet

Size : 520 \* 360 \* 290 mm

P – trap : 180 mm



white



black



gray



## Victoria



DIMENSION

Wash down Wall – hang toilet

Size : 505 \* 365 \* 360 mm

P – trap : 180 mm



white



black



gray



silver



## Helen



DIMENSION

Wash down Wall – hang toilet

Size : 530 \* 360 \* 360 mm

P – trap : 180 mm Roughing – in



white






## H2001

**DIMENSION** | Size : 490 \* 360 \* 350 mm  
P - trap : 180 mm



gray



## H2004

**DIMENSION** | hang toilet  
Size : 510 \* 380 \* 355 mm  
P - trap : 180 mm



green



## H2005

**DIMENSION** | hang toilet  
Size : 520 \* 370 \* 340 mm  
P - trap : 180 mm



white



## 9017

**DIMENSION** | hang toilet  
Size: 570 \* 350 \* 330  
P - trap : 180 mm



white





## 9029

**DIMENSION** | Size : 580 \* 410 \* 410 mm  
P - trap : 180 mm



white





Wall hung SMART toilet



# WK-SW001

Wall hung SMART toilet  
 Size : 565 \* 390 \* 440 mm


DIMENSION




white



Remote Control

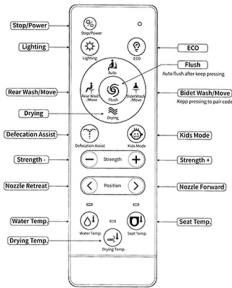

Name of parts

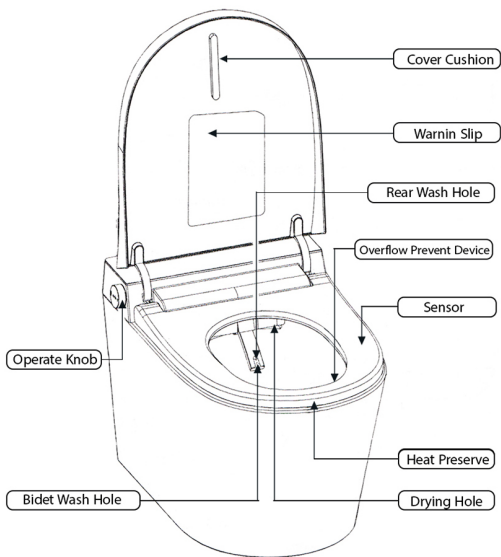

## Specification

Technical Parameters		220V-50Hz Maximum Power : 1200W Rated Power : 1650W ( Test Conditions: inlet water temp. 15±1°C, ambient temperature 20±5°C )
Water Inlet	Source	Running water
	Pressure	Min 0.05Mpa ~ Max 0.75Mpa
	Rear washing water volume	0.66L/min ( max )
	Bidet washing water volume	0.68L/min ( max )
	Temp. adjustable	Normal~High (≈39°C)
	Heating power	Maximum 1200W
Seat cover heating device	Safety device	Temp. switch, water temp. sensor, temp. fuse
	Temp. adjustable	Normal~High (≈38°C)
	Heating power	Maximum 35W
Drying device	Safety device	Temp. switch, seat temp. sensor, temp. fuse
	Temp. adjustable	Normal~High (≈55°C)
	Heating power	Maximum 200W
Safety device	Safety device	Temp. switch, temp. fuse
	Electrical leakage protecting device	
Length of power line	1.5m	